




**Outline Dimension**

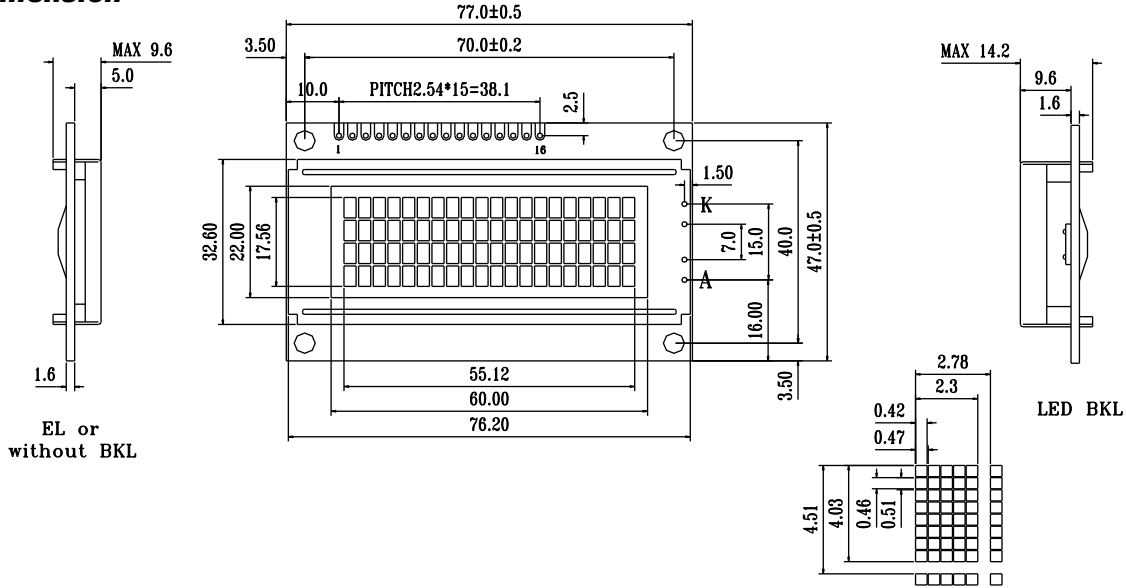

**Feature**

1. 5X8 dots with cursor
2. Built-in controller (KS0066U or Equivalent)
3. +5V power supply(Also available for +3.0V)
4. 1/16 duty cycle
5. BKL to be driven by pin1,pin2,or pin15,pin16,or A,K
6. N.V.optional

**Mechanical Data**

Item	Standard	Unit
Module dimension	98.0x60.0	mm
Viewing area	78.0x25.2	mm
Dot size	0.55x0.55	mm
Character size	2.95x4.75	mm

**Interface pin connections**

PIN NO	Symbol	Function
1	VSS	GND
2	VDD	+5V
3	V0	Contrast adjustment
4	RS	H/L Register select signal
5	R/W	H/L Read/Write signal
6	E	H/L Enable signal
7	DB0	H/L Data bus line
8	DB1	H/L Data bus line
9	DB2	H/L Data bus line
10	DB3	H/L Data bus line
11	DB4	H/L Data bus line
12	DB5	H/L Data bus line
13	DB6	H/L Data bus line
14	DB7	H/L Data bus line
15	A	+4.2V for BKL
16	K	Power supply for BKL(0V)

**Absolute Maximum Rating**

Item	Symbol	Standard			Unit
		Min	Typ	Max	
Power supply	VDD-VSS	-0.3	-----	5.5	V
Input voltage	VI	-0.3	-----	VDD	

**Electronical characteristics**

Item	Symbol	Condition	Standard			Unit
			Min	Typ	Max	
Input voltage	VDD	+5V	4.7	5.0	5.5	V
		+3.3V	2.7	3.0	5.3	V
Supply current	IDD	VDD=5V	-----	2.5	5	mA
Recommended LCD driving voltage for normal temp version module	VDD-V0	-20°C	5.0	5.1	5.7	V
		0 °C	4.7	5.0	5.5	
		25°C	4.3	4.5	4.7	
		50°C	4.1	4.3	4.5	
LED forward voltage	VF	25°C	-----	4.2	4.6	V
LED forward current	IF	25°C	-----	240	-----	mA
EL power supply current	I <sub>EL</sub>	V <sub>EL</sub> =110V AC 400Hz	-----	-----	-----	mA

**Display character address code:**

Display position

1	2	3	---	---	---	---	---	19	20
DDRAM address	00	01	02	---	---	---	---	12H	13H
DDRAM address	40	41	42	---	---	---	---	52H	53H
DDRAM address	14	15	16	---	---	---	---	26H	27H
DDRAM address	54	55	56	---	---	---	---	66H	67H