

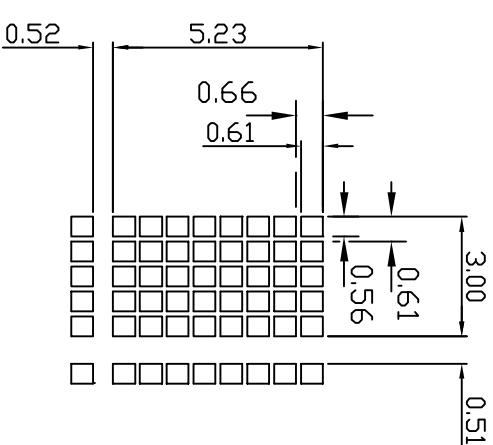
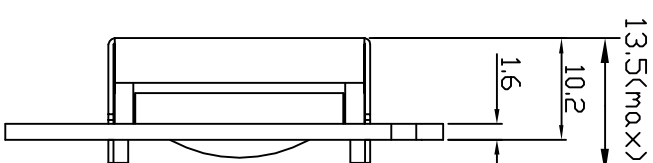


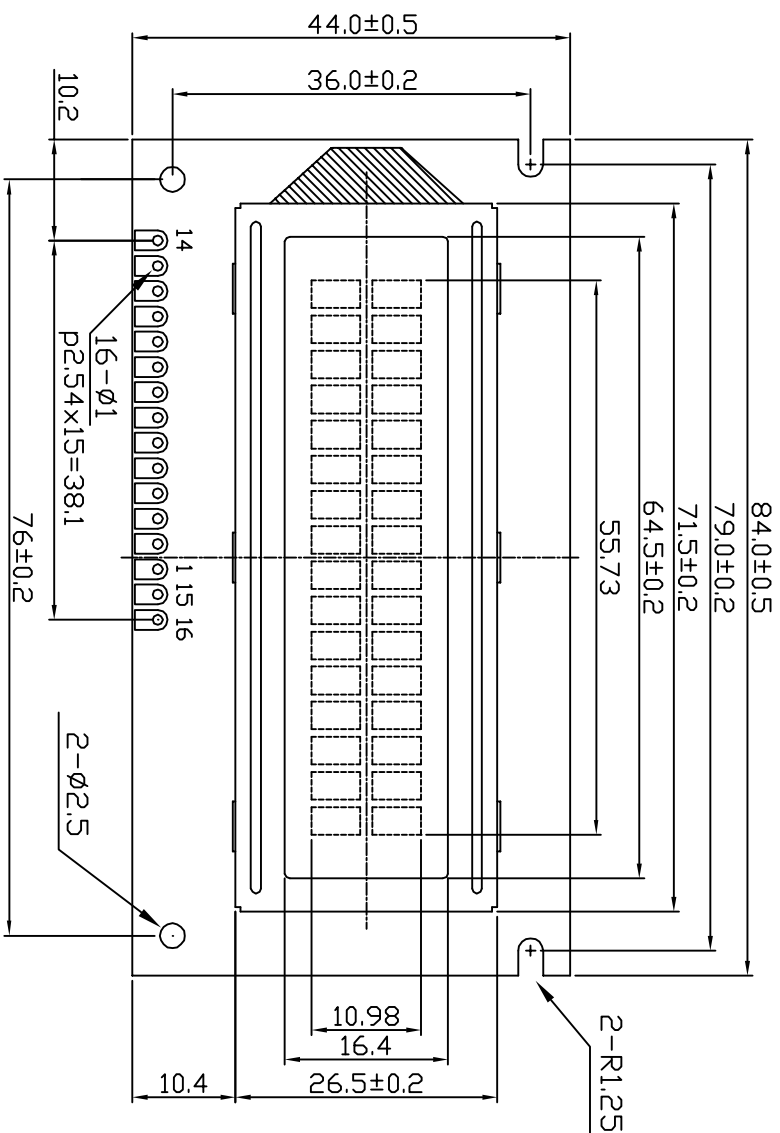

LED BKL Display Pattern

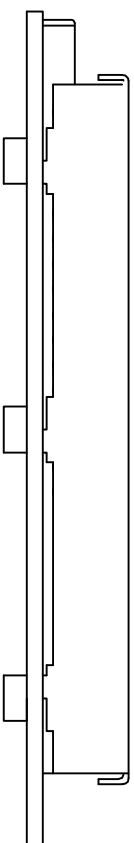

TOLERANCES UNLESS OTHERWISE STATED

XX.X ±0.20 XX.X ±0.10

PERFORMANCE FEATURES

LCD TYPE	FSTN, Transmissive, Negative
Viewing Angle	6:00
Backlight	LED side light(Red)
Operation temperature	-20° C ~ +70° C
Storage temperature	-30° C ~ +80° C
Controller	S6A0069
Operation Voltage of LCM	+5.0 V

PIN	SIGNAL	PIN	SIGNAL
1	VSS	9	DB2
2	VDD	10	DB3
3	V0	11	DB4
4	RS	12	DB5
5	R/W	13	DB6
6	E	14	DB7
7	DB0	15	K
8	DB1	16	A

XIAMEN OCULAR OPTICS CO.,LTD					
REVISION RECORD			Drawn:	Model Name:	
VER	Date	Modify	Contents	Name	Confirm
2					
3					
4					
5					
6					
				Checker:	
				Approved:	
				Date:	2008-07-28
				Page:	1-1

