



REV	DESCRIPTION:	5	DATE	6
-----	--------------	---	------	---

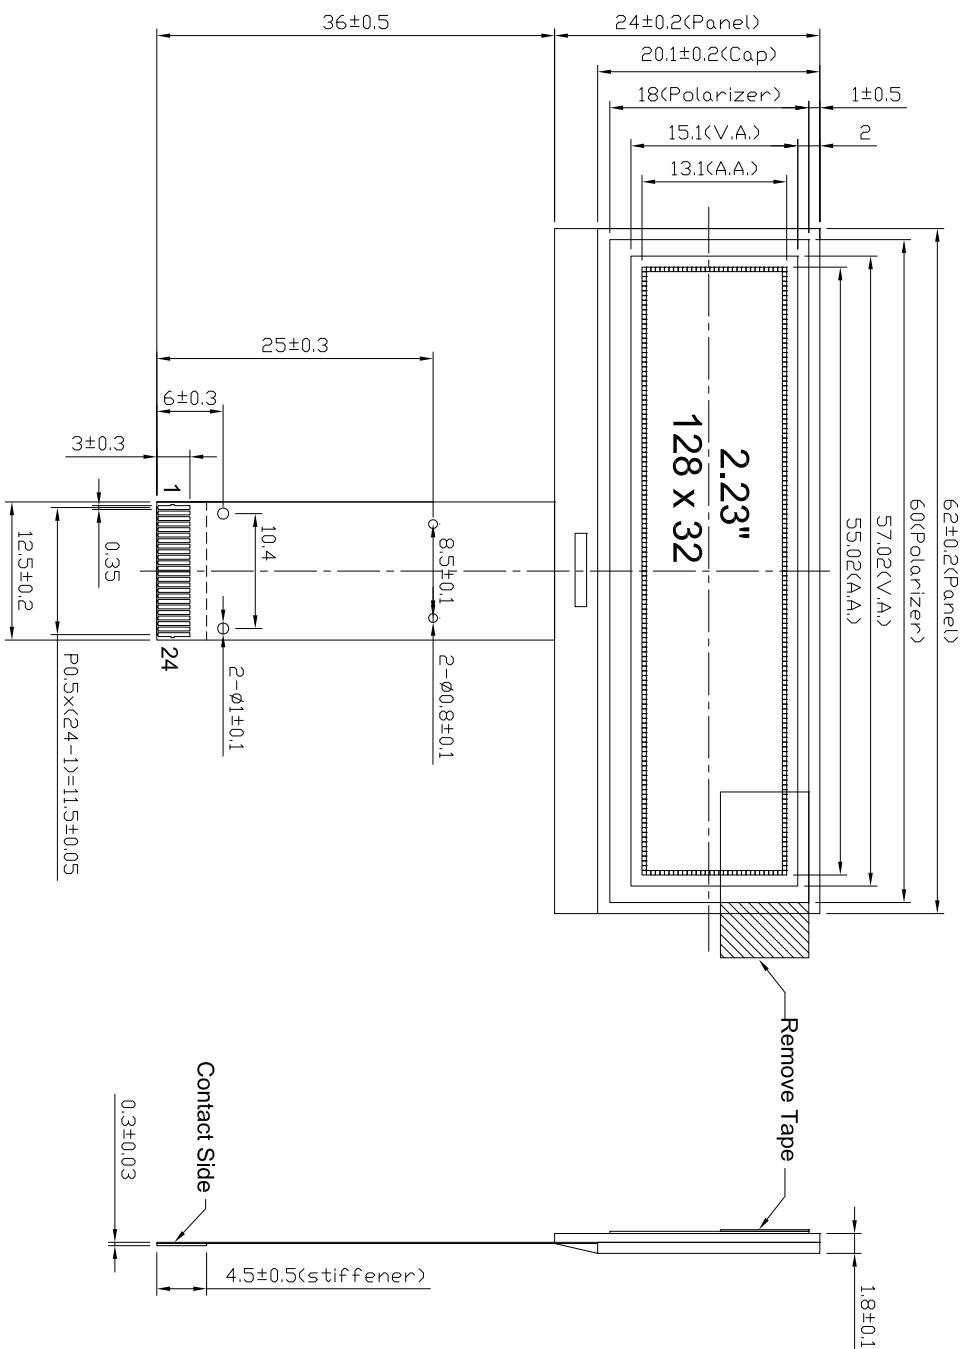

PIN	SIGNAL	PIN	SIGNAL
1	NC(GND)	16	DB3
2	VSS	17	DB4
3	VSS	18	DB5
4	NC	19	DB6
5	VDD	20	DB7
6	BS1	21	IREF
7	BS2	22	VCOM/H
8	CS#	23	VCC
9	RES#	24	NC(GND)
10	D/C#		
11	R/W#		
12	E/RD#		
13	DB0		
14	DB1		
15	DB2		

**Feature:**

1. Display mode: Passive Matrix-OLED / Negative
2. Color: White
3. Viewing Direction: Free
4. Interface: 8-bit Parallel, 3 or 4-SPI, IIC
5. Driver : SSD1305 VDD: 3.3 V
6. Operating temp. : -40°C~+70°C
7. Storage temp. : -40°C~+80°C



Model Name: GDO12832A01-W		UNLESS OTHERWISE STATED		SCALE:	
APPROVALS	DATE	TOLERANCES:		SIZE:	A4
DWN: Lh	2019.10.23	XXX ±0.20	XX.X ±0.10	UNIT:	mm
CHK:				Page:	1-1
APP:					

**Xiamen Ocular Optics CO., LTD.**