

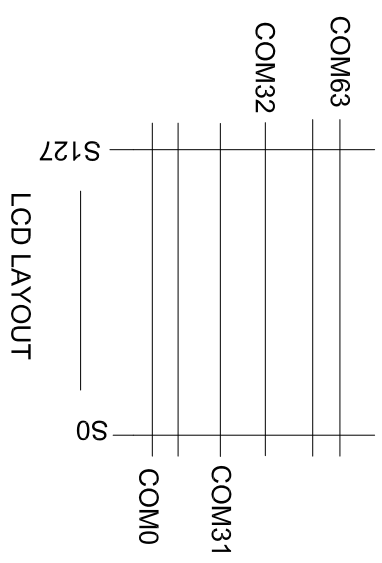
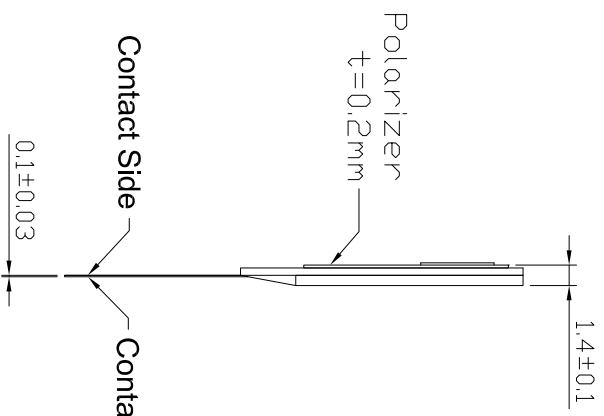


REV	DESCRIPTION:	5	DATE	6
-----	--------------	---	------	---

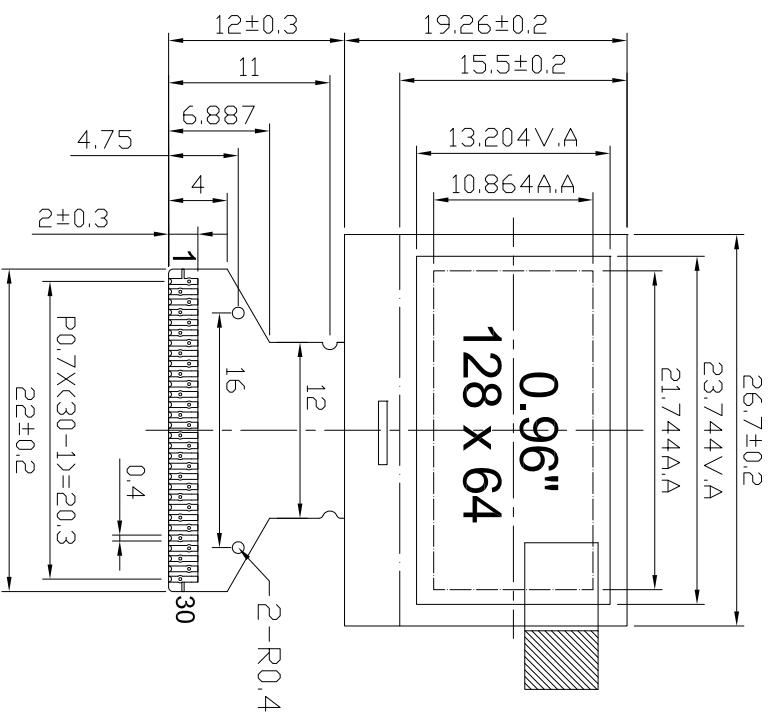

SCALE:10X

- Feature:
1. Display mode: Passive Matrix-OLED / Negative
 2. Color: White
 3. Viewing Direction: Free
 4. Interface: 8-bit Parallel, 3 or 4-SPI, IIC
 5. Driver : SSD1306 VDD: 3.3 V
 6. Operating temp. : -40°C~+70°C
Storage temp. : -40°C~+80°C
 7. ROHS Compliant

Model Name: GDO12864K01-W			
APPROVALS	DATE	UNLESS OTHERWISE STATED	
DWN: Lih	2020.03.04	TOLERANCES: XXX #0.20 X.X #0.10	
CHK:		SIZE: A4	UNIT: mm
APP:			Page: 1-1

PIN	SIGNAL	PIN	SIGNAL
1	NC(GND)	16	R/W#
2	C2P	17	E/RD#
3	C2N	18	DB0
4	C1P	19	DB1
5	C1N	20	DB2
6	VBAT	21	DB3
7	NC	22	DB4
8	VSS	23	DB5
9	VDD	24	DB6
10	BS0	25	DB7
11	BS1	26	IREF
12	BS2	27	VOOMH
13	CS#	28	VCC
14	RES#	29	VSS
15	D/C#	30	NC(GND)