

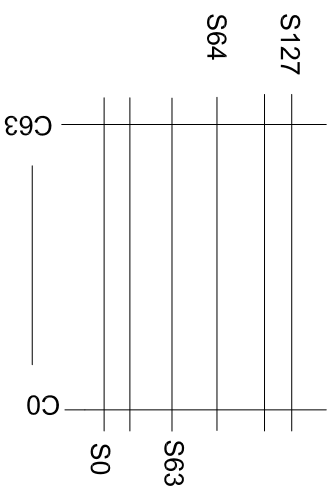
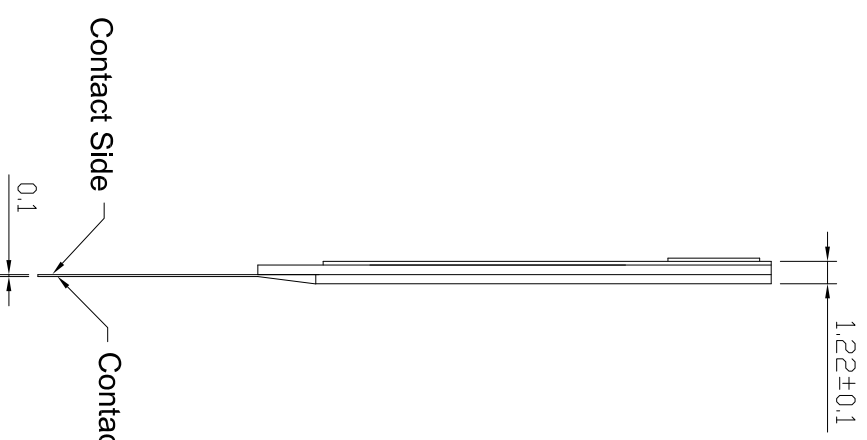


REV	DESCRIPTION:	5	DATE	6
-----	--------------	---	------	---

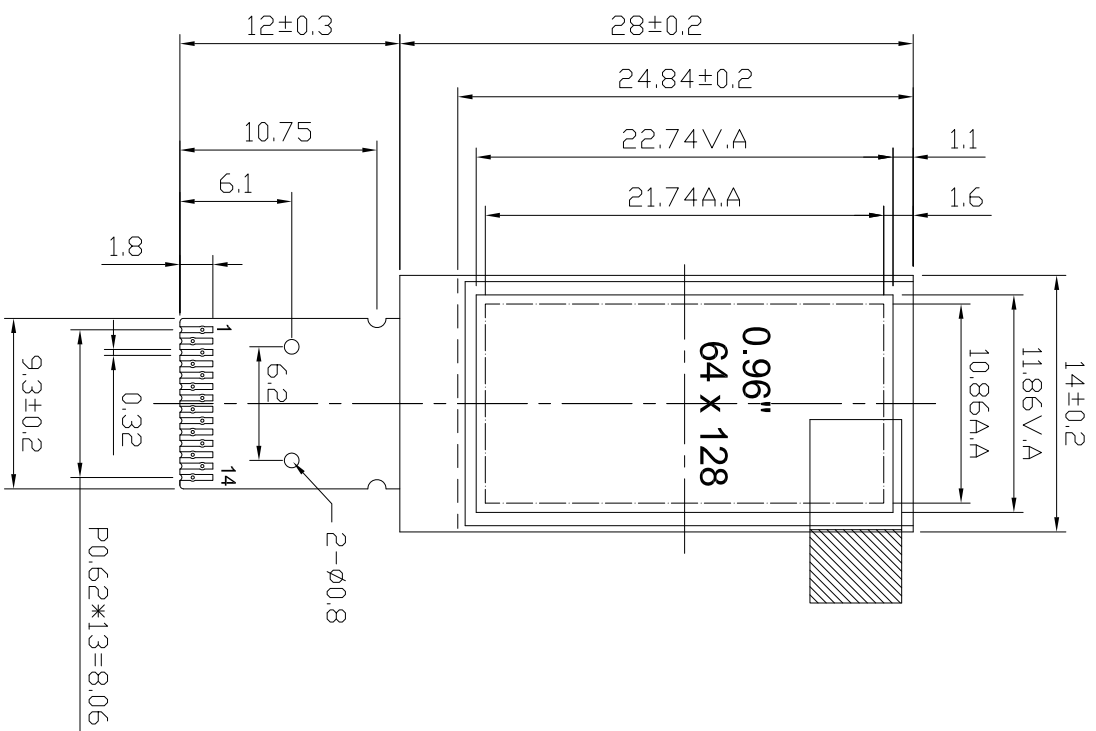

SCALE:10X

PIN#	SIGNAL
1	C2P
2	C2N
3	C1P
4	C1N
5	VBAT
6	NC
7	VSS
8	VDD
9	RES#
10	SGL
11	SDA
12	IREF
13	VCOMH
14	VCC

- Feature:
1. Display mode: Passive Matrix-OLED / Negative
 2. Color: White
 3. Viewing Direction: Free
 4. Interface: IIC
 5. Driver : SSD1312 VDD: 3.3 V
 6. Operating temp. : -40°C~+70°C
Storage temp. : -40°C~+80°C
 7. ROHS Compliant

Model Name: GD064128K01-W		UNLESS OTHERWISE STATED		SCALE:	
APPROVALS	DATE	TOLERANCES:		SIZE:	UNIT:
DWN: Lih	2020.03.04	XXX ±0.20	XX.X ±0.10	A4	mm
CHK:					Page:
APP:					1-1

Xiamen Ocular Optics CO., LTD.